Balustrades

Balustrades are an essential safety barrier for raised balconies or decks that are more than 1m from the ground. Steeline FNW offers a range of Form 15 certified Balustrades.

COASTAL

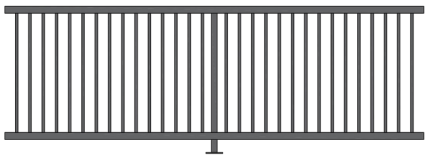

Panel

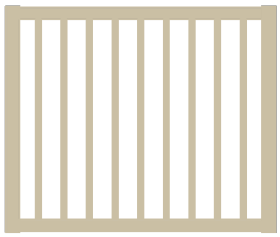

Gate

Raking Panel

- 50mm Round Handrail top & bottom
- 40mm Round Intermediate post
- 19mm Round Vertical tubes
- 95mm Centres
- Panel Height 950mm
- Centre leg 100mm off ground

MODERN

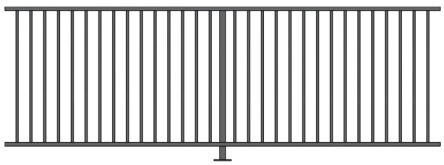

Panel



Gate



Raking Panel

- 50 x 25mm Rectangular Handrail top & bottom
- 40 x 40mm Square Intermediate post
- 37 x 16mm Vertical tubes
- 95mm Centres
- Panel Height 950mm
- Centre leg 100mm off ground

QUEENSLANDER

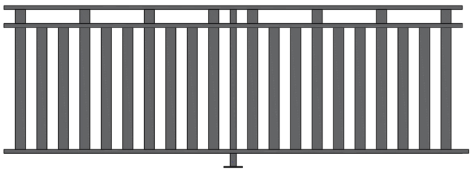

Panel



Gate

Raking Panel

- 50 x 25mm Rectangular Handrail top & bottom
- 40 x 40mm Square Intermediate post
- 65 x 16mm Vertical tubes
- 139mm Centres
- Panel Height 950mm
- Centre leg 100mm off ground

Balustrades

CLASSIC

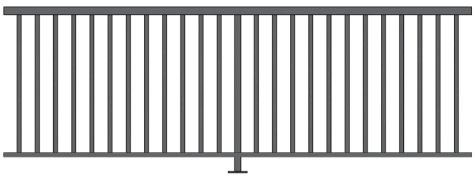

Panel

Gate

Raking Panel

- 50 x 50mm Square Top Rail
- 50 x 25mm Bottom Rail
- 40 x 40mm Square Intermediate post
- 25 x 25mm Square Vertical tubes
- 115mm Centres
- Panel Height 950mm
- Centre leg 100mm off ground

BALUSTRADES - Key Manufacturing & Compliance Information

- A 40x40mm (Round or Square) Intermediate post is welded into the panel every 1500mm
- For it to be certified, a barrier must be of Balustrade standard if it is more than 1000mm (1m) off the ground, for example a deck must have a balustrade if it is more than 1m from the ground
- Panels are attached to the end post with a standard fence bracket that suit the size of the rail
- Balustrade panels must be over 1000mm (1m) in height, including the 100mm space under the panel
- Balustrades must be fixed to an end post at each end or to the building and cannot be free standing
- The Intermediate Post will have a piece of flat bar welded to the bottom (Post Foot) with 2x drill holes to fasten it to the bottom surface (e.g. patio floor)
- As per our specifications, the Intermediate Post Foot, will be installed perpendicular to the direction of the panel - see illustration below for details

OVERHEAD VIEW

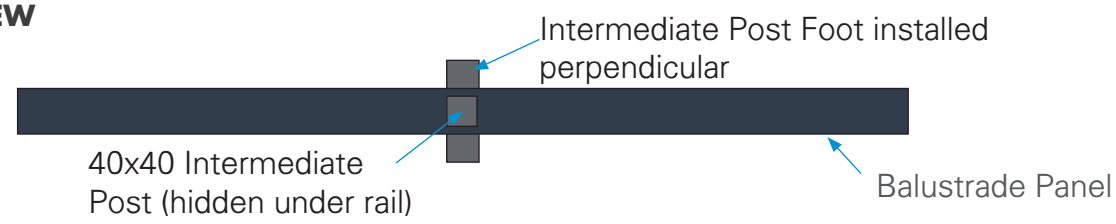

- The longest single span for one Balustrade panel is 4000mm long (welded together), including two Intermediate posts installed
- To measure the length of the stairs for a Balustrade Raking Panel, measure the total length of the rise and run for each stair (in millimetres)
- Options for fixing a Balustrade Raking Panel include:
  – Welded tabs on the top and bottom rails that can be attached the end posts
  – Top and bottom rails welded to the end posts
- We can provide a Form 15 Compliance Certificate if required, however the panels MUST be manufactured to Steeline FNW's specifications
- We do not offer a Form 16 - as that is provided by the installer

Steeline | FNW

Balustrades

BALUSTRADE POWDER COATING COLOURS

CUSTOM COLOURS AVAILABLE UPON REQUEST.

Refer www.duluxpowders.com.au/colour/for details

The colour swatches in this brochure have been reproduced to represent actual product colours as accurately as possible. However we recommend checking your chosen colour against an actual sample of the product before purchasing, as varying light conditions and limitations of the printing process may affect colour tones. As powder coating is a painting process, the final colour finish of the powder coat may vary slightly from the colours shown above. COLORBOND® and ® colour names are registered trade marks of BlueScope Steel Limited. ™ colour names are trade marks of BlueScope Steel Limited. ABN 16 000 011 058. All rights reserved.

BRISBANE • TOOWOOMBA • INVERELL

1300 BUY STEEL | info@fnw.com.au | fnw.com.au